



Iconic[®] Outdoor

Technical catalogue



pdl.co.nz/iconic

Life Is On

Schneider
Electric



Contents

Presentation	4
Overview	10
Iconic® Outdoor devices	11
Switches	11
Switched Sockets	12
Accessories	15
Wiring Diagrams	17
References	18

Overview

Outdoor like never before

Discover the Iconic® Outdoor range

Redefining weather-proof products, Iconic Outdoor is the innovative new range which achieves a balance between simplicity of installation, clever technology and consumer friendly aesthetics. Designed for the residential market, but with electrical contractors in mind, the range is suitable for Zone 2 applications.



Reduced
installation time

New patented technology for a faster, weather protected finish



Proven
durability

Design for New Zealand
outdoor living



Future-proof
design


PDL Wiser™ smart connectivity
and stylish finishes to suit your
customer's needs

Clever functionality

Iconic Outdoor is


RELIABLE

To ensure IP54 protection, all Iconic Outdoor Socket Outlets have a spring-loaded sealing shutter with a designed water channel. It is suited for applications such as zone 2 wet areas due to its IP54 protection.

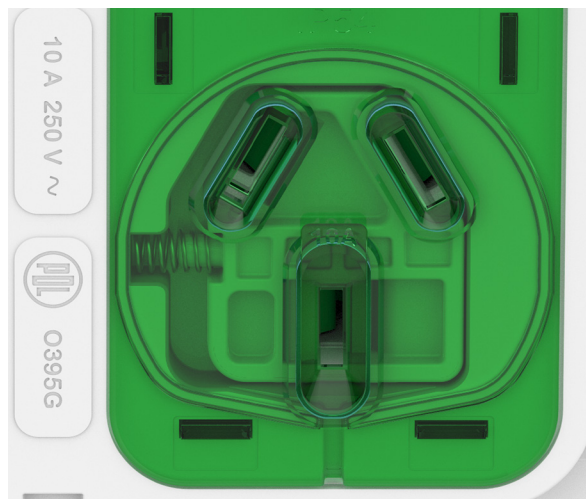


EASY TO USE

There is no need to drill holes in the products because they are designed with mounting holes outside the waterproof region. Because of the location of the mounting holes, no sealant or Screw caps are required, resulting in a clean, quick installation that maintains its IP54 rating.

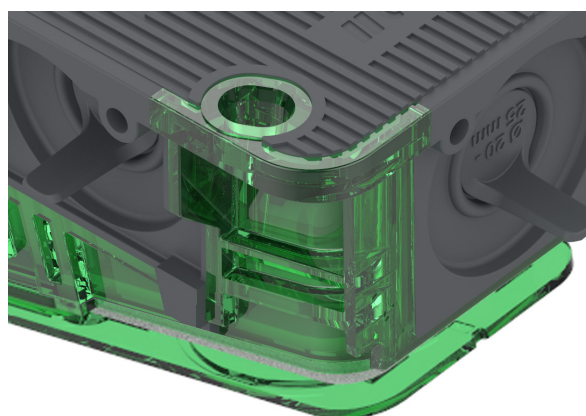

INGENIOUS


Seals are built into the frame of all conduit entries, eliminating the need for sealants. Pull tabs make it simple to open the seals, making installation a breeze.

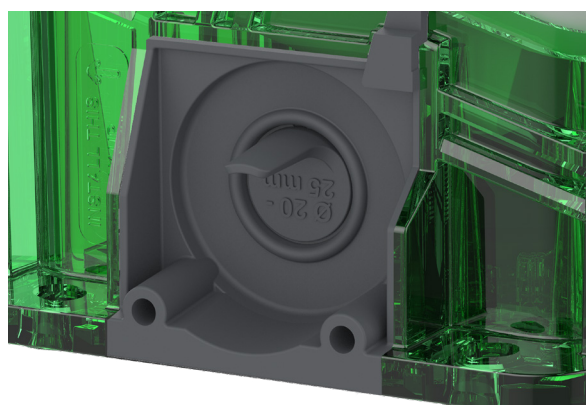

Sockets with a difference

Iconic Outdoor achieves a balance between simplicity of installation and consumer friendly aesthetics

One face for the end-user

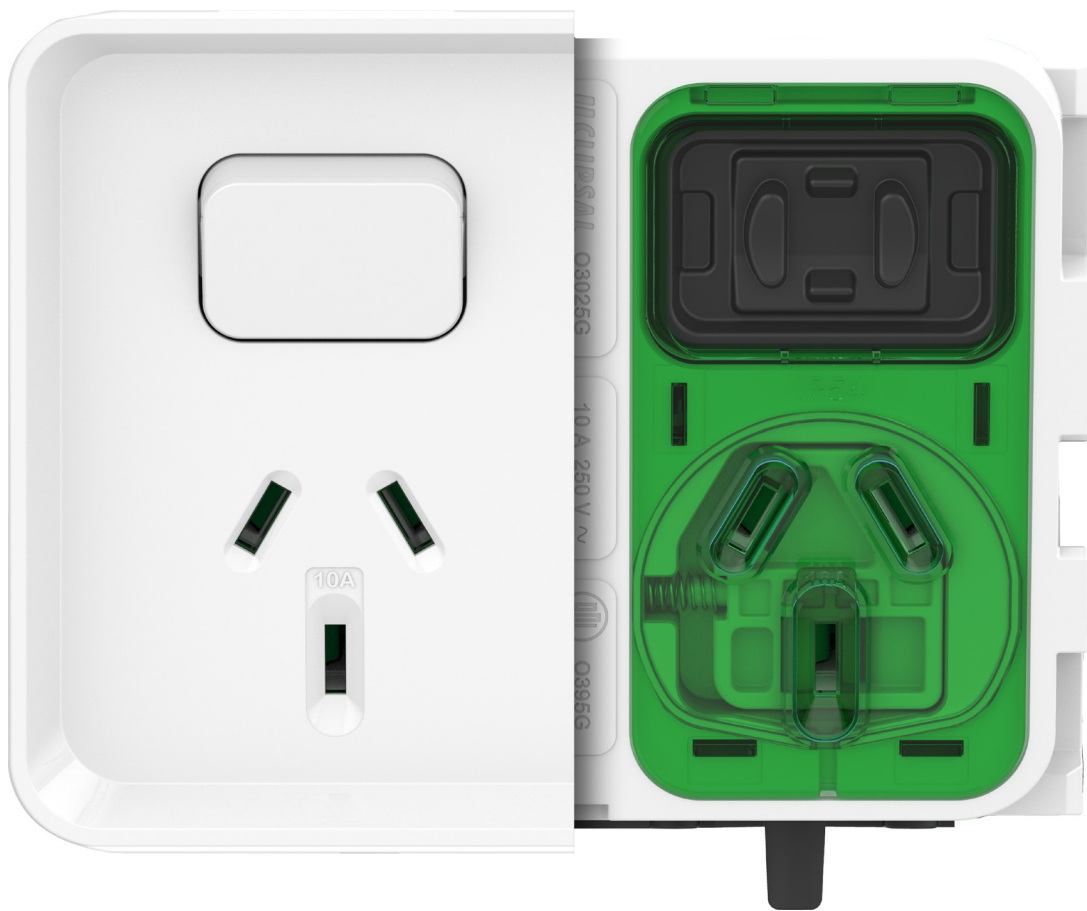


One face for the installer

Designed alongside electricians

Iconic Outdoor has been developed and tested with Electricians to bring clear innovations, a more reliable form while simplifying many steps in the installation process.

A quick and easy to install outdoor solution that has been tested for durability in Australian backyards. Residential focused aesthetic that complements the design of the home. Bringing the indoors outside by enhancing the look of your outdoor entertaining area and increasing functionality with smart home connectivity. Perfect for new builds, renovations, and retrofits.

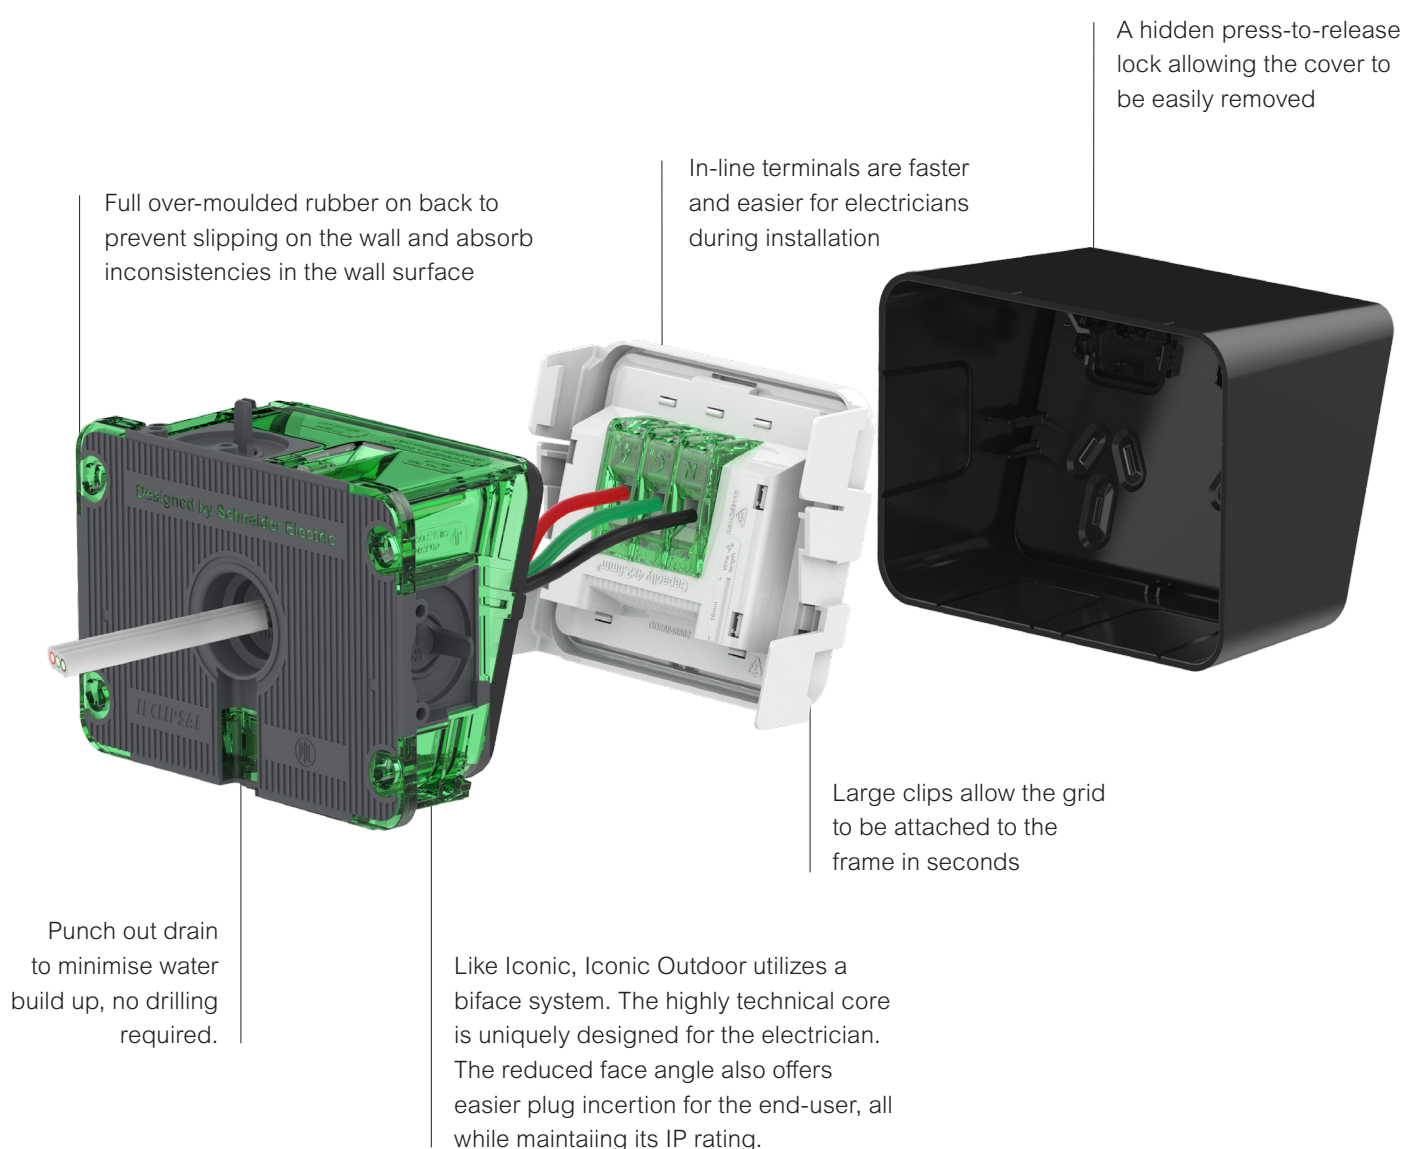

Connected Solution


Scalable, from one switch to an entire home

The Iconic Outdoor Single switched socket with timer leverages both BLE (Bluetooth Low Energy) and Zigbee technology, making them ultra-flexible and scalable. Iconic connected devices in BLE default mode can be swapped to Zigbee mode after installation to allow the smart home to evolve over time with the changing needs of the end user.



Room Control

Use the Wiser by SE App to set timers, schedulers or specific device features by pairing your smartphone to an Iconic connected device in BLE mode. When in the room, the end user can switch loads and dim lights through the Wiser by SE App or directly via the wall-mount switch. The Wiser Hub is not required.

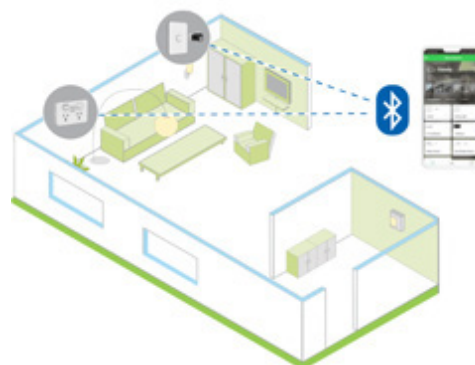

Connected Devices (BLE default)



PDLO394CS-XW

Single switched socket with timer 10A 250V



PDLO394CS-BK

Single switched socket with timer 10A 250V

Wiser System

For an advanced smart home experience, Iconic connected devices in Zigbee mode can interact with other Wiser devices that are connected to the Wiser Hub. This allows the end user to benefit from the full feature set provided by the Wiser system, including Moments, sensor triggered actions, remote access to the home and voice control. The user is still able to control loads via the wall mounted switches or the Wiser by SE App. See the Wiser System User Guide for more details.

Iconic Outdoor

The Good Design Awards jury commented:

"The clean and contemporary exterior conceals clever features for safety and sealing, making it a significant departure from existing outdoor electrical accessories."



Range overview

PDL Sockets

Available in different options:


PDLO394-XW

Single switched socket
horizontal 10A 250V




PDLO395-XW

Double switched socket
horizontal 10A 250V




PDLO394CS-XW

Single switched socket
with timer 10A 250V



PDLO394-BK

Single switched socket
horizontal 10A 250V



PDLO395-BK

Double switched socket
horizontal 10A 250V



PDLO394CS-BK

Single switched socket
with timer 10A 250V



PDL Switches

PDLO381-XW

1 gang horizontal switch
20A/16AX 250V



PDLO381-BK

1 gang horizontal switch
20A/16AX 250V



Switches




PDLO381

Iconic Outdoor - 1 gang horizontal switch 20A/16AX 250V


Main	
Range	Iconic Outdoor
Commercial Reference	PDLO381-XW PDLO381-BK
Product or component type	Switch
Device presentation	Complete product
Provided equipment	Frame, Grid plate, and Skin
Device application	Lighting
Fixing mode	Frame - By screws (horizontal) Skin, Grid, and Frame - Clip together
Type of packing	Box
Sale per indivisible quantity	1
Rated current	20 A/16 AX, 250 V ac, 50 Hz
Complementary	
Device mounting	Surface mount
Switch function	1-pole 1/2-way
Actuator	Rocker
Control type	ON/OFF Switch
Number of rockers	1
Number of conduit entries	5x, Ø20/Ø25, Rigid or Flexible
Colour	Extra White (XW), Black (BK)
Surface finish	Matt
Motor M-rating AS3133	M80
Load type	Inductive, Light, and Flourescent lamp and LED
Ambient air temperature for storage	0...60 °C
Ambient air temperature for operation	0...45 °C
Relative humidity	10...95 %
Electrical durability	12000 operating cycles to AS/NZS 3133
Connections - terminals	4 x screw terminals
Screwdriver shape	Philips No 2, Square drive No 1 (SQ1)
Clamping connection capacity	4 x 1.5 mm², 3 x 2.5 mm²
Wire stripping length	10 mm
Material	Frame : PC (polycarbonate) and TPE (thermoplastic elastomer) Grid plate : PC (polycarbonate) Skin : ABS (acrylonitrile butadiene-styrene) Housing : PC (polycarbonate) Housing : PA66 Locking bar : POM (polyoxymethylene)
Dimensions (H x W x D) mm	85 x 115 x 70
Product weight	0.188 kg
Standards	AS/NZS 3133
Environment	
Product certification	RCM
IP degree of protection	IP56



Dimensions (mm)

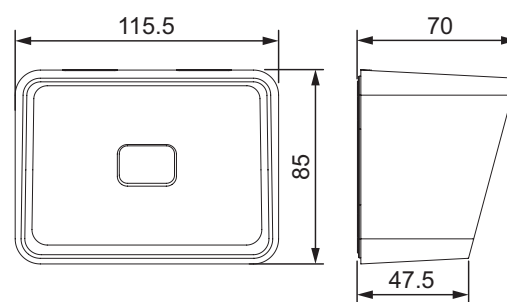

Mounting centres (mm)



Switched Sockets




PDLO394

Iconic Outdoor - Single switched socket horizontal 10A 250V


Main	
Range	Iconic Outdoor
Commercial Reference	PDLO394-XW PDLO394-BK
Product or component type	Switched socket
Outlet poles configuration	1P + E with shutter
Device presentation	Complete product
Provided equipment	Frame, Grid plate, and Skin
Fixing mode	Frame - By screws (horizontal) Skin, Grid, and Frame - Clip together
Type of packing	Box
Sale per indivisible quantity	1
Rated current	10 A, 250 V ac, 50 Hz
Complementary	
Device mounting	Surface mount
Number of power socket outlets	1
Control type	ON/OFF Switch
Number of rockers	1
Number of conduit entries	5x, Ø20/Ø25, Rigid or Flexible
Colour	Extra White (XW), Black (BK)
Surface finish	Matt
Motor M-rating AS/NZS 3133	M40
Ambient air temperature for storage	0...60 °C
Ambient air temperature for operation	0...45 °C
Relative humidity	10...95 %
Electrical durability	12000 operating cycles to AS/NZS 3133
Mechanical durability	20000 plugging operating cycles
Connections - terminals	3 x screw terminals
Screwdriver shape	Philips No 2, Square drive No 1 (SQ1)
Clamping connection capacity	3 x 2.5 mm², 2 x 4.0 mm²
Wire stripping length	16 mm
Material	Frame : PC (polycarbonate) and TPE (thermoplastic elastomer) Grid plate : PC (polycarbonate) Shutter : POM (polyoxymethylene) Skin : ABS (acrylonitrile butadiene-styrene)
Dimensions (H x W x D) mm	85 x 115 x 70
Product weight	0.218 kg
Standards	AS/NZS 3112
Environment	
Product certification	RCM
IP degree of protection	IP54



Dimensions (mm)

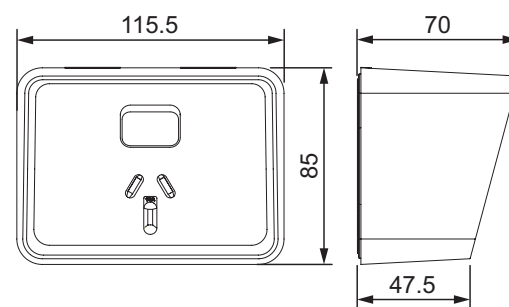

Mounting centres (mm)



Switched Sockets (cont'd)




PDLO395

Iconic Outdoor - Double switched socket horizontal 10A 250V


Main	
Range	Iconic Outdoor
Commercial Reference	PDLO395-XW PDLO395-BK
Product or component type	Switched socket
Outlet poles configuration	1P + E with shutter
Device presentation	Complete product
Provided equipment	Frame, Grid plate, and Skin
Fixing mode	Frame - By screws (horizontal) Skin, Grid, and Frame - Clip together
Type of packing	Box
Sale per indivisible quantity	1
Rated current	10 A, 250 V ac, 50 Hz
Complementary	
Device mounting	Surface mount
Number of power socket outlets	2
Control type	ON/OFF Switch
Number of rockers	2
Number of conduit entries	5x, Ø20/Ø25, Rigid or Flexible
Colour	Extra White (XW), Black (BK)
Surface finish	Matt
Motor M-rating AS/NZS 3133	M40
Ambient air temperature for storage	0...60 °C
Ambient air temperature for operation	0...45 °C
Relative humidity	10...95 %
Electrical durability	12000 operating cycles to AS/NZS 3133
Mechanical durability	20000 plugging operating cycles
Connections - terminals	3 x screw terminals
Screwdriver shape	Philips No 2, Square drive No 1 (SQ1)
Clamping connection capacity	4 x 2.5 mm², 3 x 4.0 mm²
Wire stripping length	16 mm
Material	Frame : PC (polycarbonate) and TPE (thermoplastic elastomer) Grid plate : PC (polycarbonate) Shutter : POM (polyoxymethylene) Skin : ABS (acrylonitrile butadiene-styrene)
Dimensions (H x W x D) mm	85 x 115 x 70
Product weight	0.240 kg
Standards	AS/NZS 3112
Environment	
Product certification	RCM
IP degree of protection	IP54



Dimensions (mm)

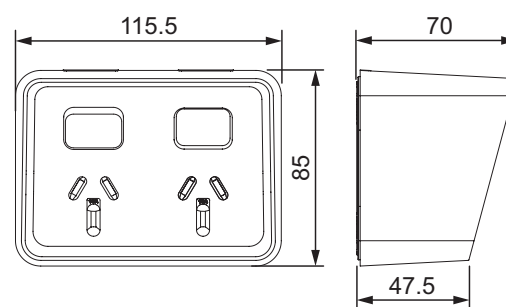

Mounting centres (mm)



Switched Sockets (cont'd)




PDLO394CS

Iconic Outdoor - Single switched socket with timer 10A 250V


Main	
Range	Iconic Outdoor
Commercial Reference	PDLO394CS-XW PDLO394CS-BK
Product or component type	Switched socket
Outlet poles configuration	1P + E with shutter
Device presentation	Complete product
Provided equipment	Frame, Grid plate, and Skin
Fixing mode	Frame - By screws (horizontal) Skin, Grid, and Frame - Clip together
Type of packing	Box
Sale per indivisible quantity	1
Rated current	10 A, 250 V ac, 50 Hz
Complementary	
Device mounting	Surface mount
Number of power socket outlets	1
Control type	ON/OFF Switch, Wiser by SE App
Number of rockers	1
Number of conduit entries	5x, Ø20/Ø25, Rigid or Flexible
Colour	Extra White (XW), Black (BK)
Surface finish	Matt
Motor M-rating AS/NZS 3133	M40
Ambient air temperature for storage	0...60 °C
Ambient air temperature for operation	0...45 °C
Relative humidity	10...95 %
Electrical durability	12000 operating cycles to AS/NZS 3133
Mechanical durability	20000 plugging operating cycles
Connections - terminals	3 x screw terminals
Screwdriver shape	Philips No 2, Square drive No 1 (SQ1)
Clamping connection capacity	3 x 2.5 mm², 2 x 4.0 mm²
Wire stripping length	16 mm
Material	Frame : PC (polycarbonate) and TPE (thermoplastic elastomer) Grid plate : PC (polycarbonate) Shutter : POM (polyoxymethylene) Skin : ABS (acrylonitrile butadiene-styrene)
Dimensions (H x W x D) mm	85 x 115 x 82
Product weight	0.292 kg
Standards	AS/NZS 3112
Environment	
Product certification	RCM
IP degree of protection	IP54



Dimensions (mm)

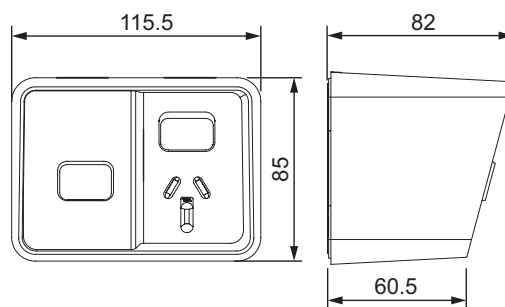

Mounting centres (mm)



Accessories




PDLO300CE-20

Conduit Cover Ø20mm


Main	
Range	Iconic Outdoor
Commercial Reference	PDLO300CE-20 O3000CE-20-BK
Product or component type	Conduit Cover
Complementary	
Fixing mode	Clip-in
Colour	Extra White (XW), Black (BK)
Surface finish	Matt
Conduit type	Flexible and Rigid
Type of packing	Paper bag
Quantity per set	2
Ambient air temperature for storage	0...60 °C
Ambient air temperature for operation	0...45 °C
Relative humidity	10...95 %
Material	ABS (acrylonitrile butadiene-styrene)
Dimensions (H x W x D) mm	33.5 x 38 x 11.1
Product weight	0.003 kg



Dimensions (mm)

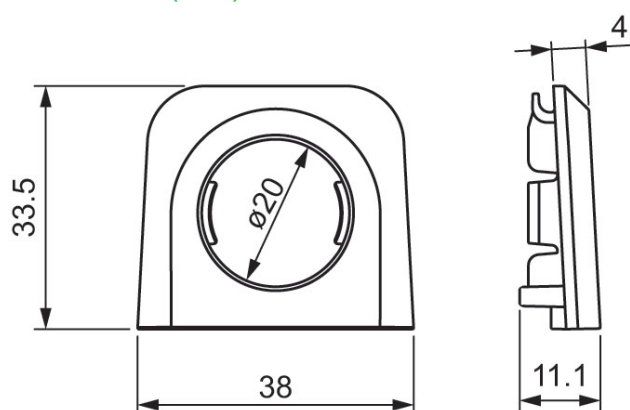

Conduit locations (mm)

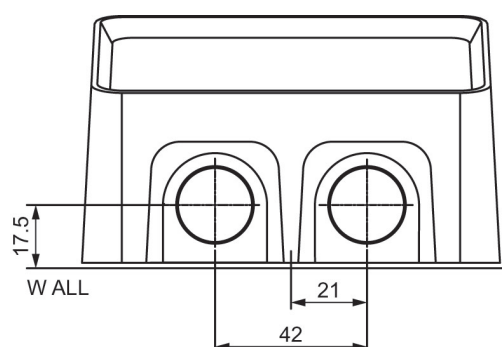

Accessories (cont'd)


PDLO300CE-25

Conduit Cover Ø25mm


Main	
Range	Iconic Outdoor
Commercial Reference	PDLO300CE-25 O3000CE-25-BK
Product or component type	Conduit Cover
Complementary	
Fixing mode	Clip-in
Colour	Extra White (XW), Black (BK)
Surface finish	Matt
Conduit type	Flexible and Rigid
Type of packing	Paper bag
Quantity per set	2
Ambient air temperature for storage	0...60 °C
Ambient air temperature for operation	0...45 °C
Relative humidity	10...95 %
Material	ABS (acrylonitrile butadiene-styrene)
Dimensions (H x W x D) mm	33.5 x 38 x 11.1
Product weight	0.003 kg



Dimensions (mm)

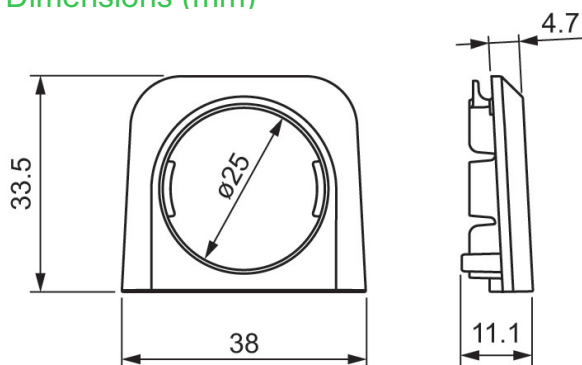

Conduit locations (mm)

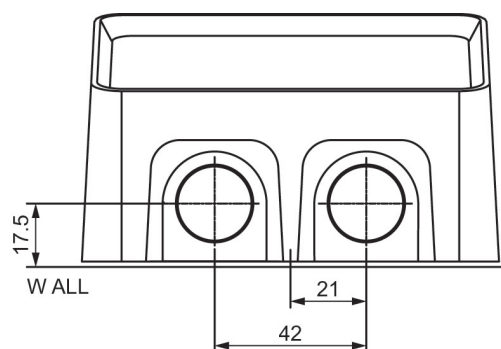





Wiring Diagrams

Single switched sockets with timer - PDLO394CS

Single switched socket wired downstream of the timer

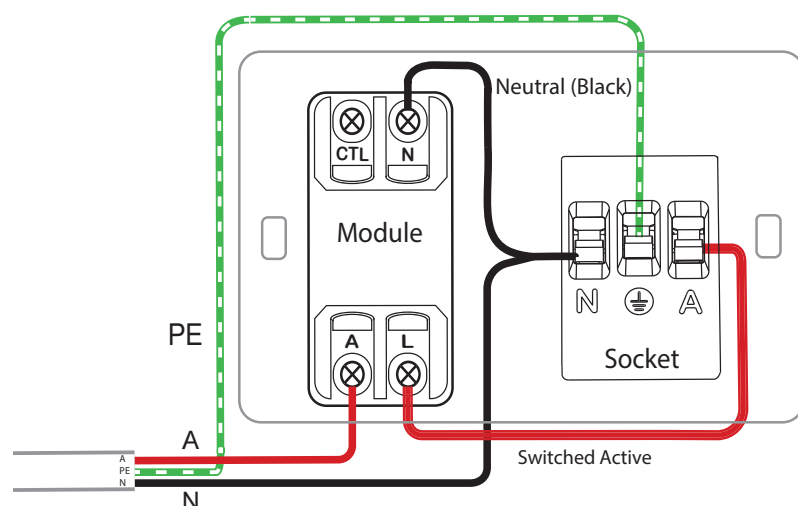

Circuit looped, single switched socket wired downstream of the timer

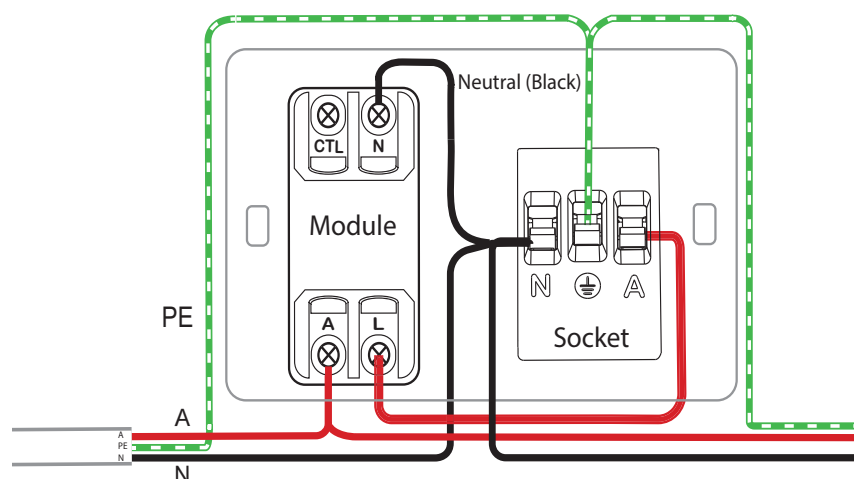

Note: Loop out of the Active terminal "A" of the module, as shown in the diagram. Do not loop out from the Socket Active terminal "A".

References

Ref.	Pages
PDLO381-BK	11
PDLO381-XW	11
PDLO394-BK	12
PDLO394-XW	12
PDLO395-BK	13
PDLO395-XW	13
PDLO394CS-BK	14
PDLO394CS-XW	14
PDLO300CE-20	15
O3000CE-20-BK	15
PDLO300CE-25	16
O3000CE-25-BK	16



Green Premium™

An industry leading portfolio of offers delivering sustainable value



More than 75% of our product sales offer superior transparency on the material content, regulatory information and environmental impact of our products:

- RoHS compliance
- REACH substance information
- Industry leading # of PEP's*
- Circularity instructions



Discover what we mean by green

[Check your products!](#)

The Green Premium program stands for our commitment to deliver customer valued sustainable performance. It has been upgraded with recognized environmental claims and extended to cover all offers including Products, Services and Solutions.

CO₂ and P&L impact through... Resource Performance

Green Premium brings improved resource efficiency throughout an asset's lifecycle. This includes efficient use of energy and natural resources, along with the minimization of CO₂ emissions.

Cost of ownership optimization through... Circular Performance

We're helping our customers optimize the total cost of ownership of their assets. To do this, we provide IoT-enabled solutions, as well as upgrade, repair, retrofit, and remanufacture services.

Peace of mind through... Well-being Performance

Green Premium products are RoHS and REACH compliant. We're going beyond regulatory compliance with step-by-step substitution of certain materials and substances from our products.

Improved sales through... Differentiation

Green Premium delivers strong value propositions through third-party labels and services. By collaborating with third-party organizations we can support our customers in meeting their sustainability goals such as green building certifications.

*PEP: Product Environmental Profile (i.e. Environmental Product Declaration)

Outdoor like never before

Life Is On

Schneider
Electric



For more information about the Iconic range, contact your local Schneider Electric representative, electrical wholesaler or visit pdl.co.nz/iconic.

Schneider Electric New Zealand Limited.
Level 2, Building 6, 60 Highbrook Drive
Highbrook, Auckland 2013
PO Box 259370, Botany,
Manukau 2163
se.com/nz

Phone: +64 9 829 0490
Fax: +64 9 829 0491
Website: www.pdl.co.nz
National Customer Care
Phone: 0800 652 999
Email: sales@nz.se.com

02-2022

© 2022 Schneider Electric. All Rights Reserved. PDL Iconic is a registered trademark of Schneider Electric (NZ) Limited.
LSB03180EN-01



pdl.co.nz/iconic

Life Is On

Schneider
Electric